



and 790SS Hot Water Pressure Washers

#1 in North America for High-Pressure Cleaning Equipment

Electric / Belt Drive

Pressure relief valve protects the machine and user from thermal expansion



Upright, oil fired burner delivers high efficiency with diesel fuel, kerosene or home-heating oil

> **Control panel** includes adjustable temperature control plus heavy-duty heater and pump motor

> > 5 HP, 230V, 1 PH Baldor electric motor (Model 795SS) comes with thermal overload protection and manual reset



Rugged belt drive provides smooth, quiet operation and outstanding reliability

Rust-proof cross linked polyethylene fuel tank eliminates condensation that can contaminate fuel. Fuel gauge in cap.

Model 795SS 3.5 GPM @2000 PSI

Convenient hose-reel bracket accepts swivel or stationary reels

Ground Fault Circuit Interrupter (GFCI breaker) provides additional protection against shock hazard

High quality float valve helps maintain constant pressure and flow and traps sediment or debris.

It is recessed at center

and balance

of chassis for protection

Hotsy-designed Triplex pumps carry a 7-year limited warranty



Pneumatic tires with inner tubes provide easy maneuverability over pavement or rough terrain

Variable upstream detergent injection ensures high-pressure

sudsing



Built-in wand and nozzle holders provide convenient storage

Belt tension adjusts easily

by turning a single bolt



FEATURES

- 2.8 or 3.5 GPM @ 2000 or 3000 PSI
- Oil Fired Burners
- 208V or 230V, 1PH
- 4 to 8.2 HP
- 1330 or 1490 RPM Belt Drive Pumps

3.5 GPM

@3000 PSI

795SS, 895SS and 790SS Hot-Water ELECTRIC Models

■ Oil Fired Burners

■ 2.8 or 3.5 GPM @ 2000 or 3000 PSI

■ Hotsy 7-Year Pump Warranty

■ 1330 or 1490 RPM Belt Drive Pumps

Designed for tough, industrial cleaning.

SPECIFICATIONS BELT DR													
MODEL	GPM	PSI	НР	MOTOR RPM	VOLT/PH	AMP	FUEL	PUMP MODEL	PUMP RPM	BTU/HR	PORTABILITY	HOSE	SHIP WT (lbs)
790SS	2.8	2000	4TEFC*	1725	230/1	20	Oil	HHC340R.1	1330	289,900	Std	50'	460
795SS	3.5	2000	5	3450	230/1	24	Oil	HHC340R.1	1490	289,900	Std	50'	460
795SS-208	3.5	2000	5	3450	208/1	27	Oil	HHC340R.1	1490	289,900	Std	50'	500
895SS	3.5	3000	8.2	3450	230/1	36	Oil	HHC506R.1	1490	289,900	Std	50'	480

Dimensions: 37" | x 28" w x 45.5" h

*Totally enclosed fan cooled (TEFC)



Clean better with Hotsy detergents

Hotsy pressure washers clean best when matched with our specially-formulated Hotsy detergents. Nearly all 40 Hotsy detergent formulations contain Hotsy's exclusive advanced-formula HCC additives to help prevent scale build-up and fight corrosion in your equipment. Most Hotsy detergents are USDA and Canadian Agriculture approved. All are highly concentrated, so a little goes a long way.

Spend some time with a Hotsy Expert

Hotsy has more than 130 local Sales & Service Distributors in North America, all factorytrained to properly evaluate your highpressure cleaning needs.

Rely on our network of seasoned service professionals for the safest, most effective and most efficient solution to your specific cleaning need.



Distributed by:

MOTA Industrial Services, LLC

106 South Lake Court, Lexington, SC 29073
Tel: 803-356-4777 ◆ Fax: 803-356-4737
www.motaindustrial.com










NOTE: We are constantly improving and updating our products. Consequently, pictures, features & specifications in this brochure may differ slightly from current models. Flow rates & pressure ratings may vary due to variances allowed by manufacturers of our machine components. We attempt to keep our machine performance within ±5% of listed specifications.

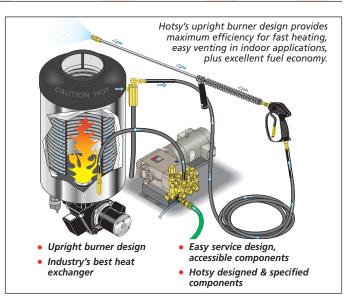

OPTIONS:

and zebra striping

 8" Oil-Fired Draft Dampener prevents backdrafts and keeps cold air out.

Hotsy Accessories customize your application for top performance

