

Cold Water Gasoline Direct Drive

CA Aluminum Series

Fitted with our patented vibration isolation plate the CA Series aluminum pressure washer is lightweight yet rugged. Designed for easy mobility, this high-performance model travels easily from jobsite to jobsite.



Pump


- Direct drive triplex piston AR or General pump with ceramic plungers
- General pumps feature external bypass system which allows more water into the system to protect from heat build-up
- Stainless-steel and brass unloader with adjustable pressure
- Forged brass manifold
- Thermal relief valve
- In-line water strainer

Engine

- Performance-proven engine with low-oil protection

Frame

- Light, corrosion resistant aluminum frame
- 1-inch aluminum handles for easier pulling
- Aluminum base plate and solid full-length axle
- Convenient nozzle holder for quick connect nozzles
- Pneumatic tires with tubes for longer life
- Dual rubber isolators

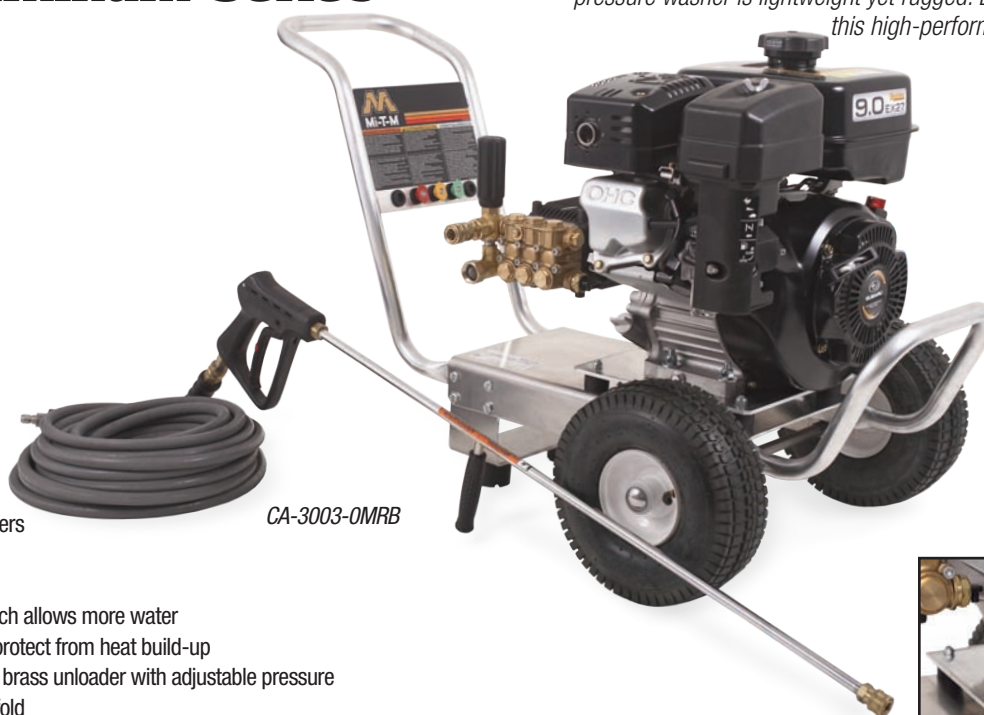

CA-3003-OMRB



Patented vibration isolation plate with four rubber isolators for reduced movement

Unit Includes

- Quick connect nozzles (0°, 15° and 25°)
- 50-foot x 3/8-inch non-marking hose with quick connects, swivel and bend restrictors
- Professional-grade insulated trigger gun with safety lock-off
- 36-inch lance with rubber grip (48-inch lance on 3500 & 4000-PSI models)

Warranties



Model Number	PSI	GPM	Displacement/Engine	Dimensions (LxWxH)	Ship Wt.	Net Wt.
CA-2403-OMHB	2400	2.4	196cc Honda OHV	39in.x20.5in.x24.5in.	100 lbs.	73 lbs.
CA-2403-OMRB	2400	2.4	211cc Subaru OHC	39in.x20.5in.x24.5in.	100 lbs.	73 lbs.
CA-2703-OMHB	2700	2.4	196cc Honda OHV	39in.x20.5in.x24.5in.	100 lbs.	73 lbs.
CA-2703-OMRB	2700	2.4	211cc Subaru OHC	39in.x20.5in.x24.5in.	100 lbs.	73 lbs.
CA-3003-OMHB	3000	3.0	270cc Honda OHV	42.5in.x23.5in.x24.5in.	155 lbs.	105 lbs.
CA-3003-OMRB	3000	3.0	265cc Subaru OHC	42.5in.x23.5in.x24.5in.	155 lbs.	105 lbs.
CA-3504-OMHB	3500	3.5	389cc Honda OHV	42.5in.x23.5in.x24.5in.	175 lbs.	125 lbs.
CA-3504-OMRB	3500	3.5	404cc Subaru OHC	42.5in.x23.5in.x24.5in.	175 lbs.	125 lbs.
CA-3504-1MHB*	3500	4.0	389cc Honda OHV	42.5in.x23.5in.x24.5in.	175 lbs.	125 lbs.
CA-4004-OMHB	4000	3.5	389cc Honda OHV	42.5in.x23.5in.x24.5in.	175 lbs.	125 lbs.
CA-4004-OMRB	4000	3.5	404cc Subaru OHC	42.5in.x23.5in.x24.5in.	175 lbs.	125 lbs.
CA-4004-1MHB*	4000	4.0	389cc Honda OHV	42.5in.x23.5in.x24.5in.	175 lbs.	125 lbs.

*Model comes standard with external bypass system and General pump.

ACCESSORIES & OPTIONS

Part Number	Description	Fits Models
50-0161	High pressure detergent injection - High pressure water mixes with detergent to clean even the heaviest build-up	All models
AW-8400-0021	Low pressure detergent injection - Allows the user to apply the recommended detergents	All models
CX-0005	Insulated dual lance - Has both a high and low pressure tip that allows you to switch to the low pressure chemical injector without having to change tips	All models
CX-0083	External bypass - Allows more water into the system to protect from heat build-up	2400 to 2700-PSI models
CX-0084	External bypass - Allows more water into the system to protect from heat build-up	3000 to 4000-PSI models
TX-1002-W	Puncture-proof tires - Tires are flat-free and maintenance-free, 10-inch, white hub, two tires	All models