

# Single-Axle Trailers

Mi-T-M offers several options for trailer mounted pressure washers for the ultimate in portable cleaning. Trailer units are fully integrated, self-contained systems and are designed with a large water supply tank for working at remote sites where water is not accessible. The heavy-duty construction of the trailer and the axle suspension provides an easy ride ensuring the longevity of your equipment. Add a high quality Mi-T-M pressure washer and you are ready to deliver big power to get big jobs done quickly, wherever you need to work.

**AW-9000-0005** (With surge brakes and 200-gallon water tank)


**AW-9000-0006** (With electric brakes and 200-gallon water tank)

**AW-9000-0007** (With 200-gallon water tank only, no brakes)

- 5-foot x 8½-foot trailer
- 3-inch x ¼-inch angle frame
- 3,500-lb. gross vehicle weight
- (1) 3,500-lb. axle
- (2) ST205-75R 15-inch radial tires with white spoke rims
- (2) fenders
- 2-inch coupler
- Swivel jack with pad
- Rubber mounted sealed lights
- Tank is enclosed in a powder coated steel frame
- Pressure washers sit on solid ¼-inch steel base (will fit all Mi-T-M pressure washers)
- Aluminum treadplate steps for access to water tanks

## Accessories for Single-Axle Trailers

- Pressure washers
- Hose reels

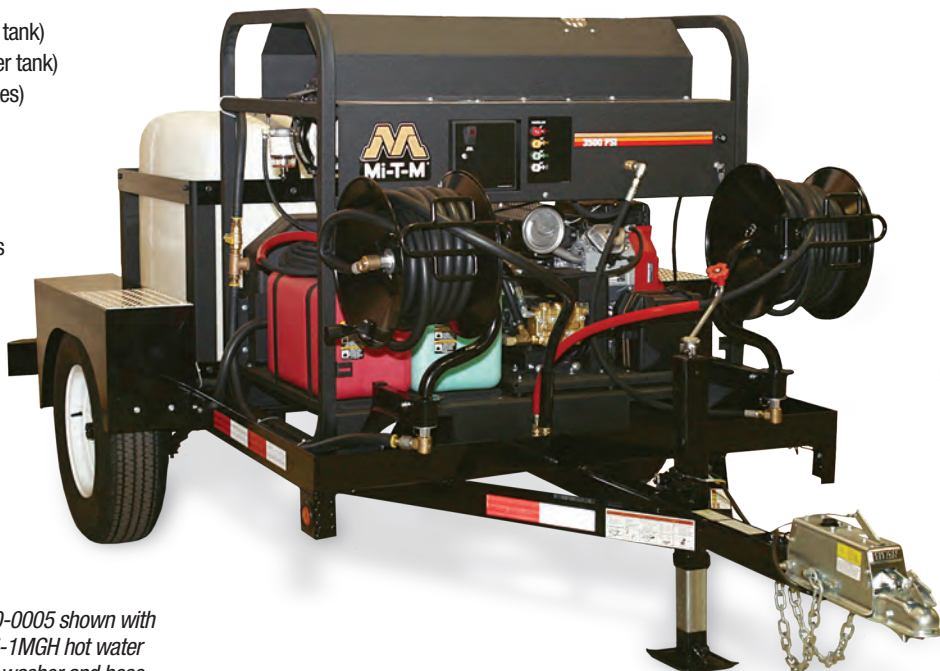

*AW-9000-0005 shown with HS-3505-1MGH hot water pressure washer and hose reels (available as accessories)*



## Trailer Options for Single & Dual-Axle Trailers

### High Pressure Hose Reel Options

These high pressure hose reel options include the hose reel with jumper hose and mounting bracket.

**TX-0001** (13-inch reel)

**TX-0002** (16-inch reel)

### Low Pressure Hose Reel Options

These low pressure hose reel options include the hose reel with mounting bracket and plumbing.

**TX-0003** (16-inch reel)

*Note: 22-0136 back-flow preventor must be used with TX-0003, when used in California.*

### Replacement Hose Reel Parts

When adding hose reels to the single or dual-axle trailers, use the following jumper hose and mounting bracket.

**15-0159** (Jumper hose)

**13-0179A01** (Mounting bracket)

**50-0195** (13-inch reel, 150-foot maximum hose length)

**50-0196** (16-inch reel, 200-foot maximum hose length)

### Back-Flow Preventors

These back-flow preventors are required on trailer units in some states.

**22-0136** (Use if a trailer has a hose reel for the supply)

- Mounted on inlet side of trailer
- To be used with TX-0003 Low pressure hose reel option

**TX-0005** (Trailer tank bypass - for use on HS Series models)

- To be used on dual-axle trailers only
- Removes the float system, while adding the necessary plumbing
- Water bypasses back to water tank

**TX-0007** (Trailer tank bypass - for use on HS Series models)

- To be used on single-axle trailers only
- Removes the float system, while adding the necessary plumbing
-

# Dual-Axle Trailers

**AW-9000-0003** (With surge brakes and (2) 200-gallon water tanks)  
**AW-9000-0004** (With electric brakes and (2) 200-gallon water tanks)


- 5-foot x 8½-foot trailer
- 3-inch x ¼-inch angle frame
- 7,000-lb. gross vehicle weight
- (2) 3,500-lb. axles with brakes on both sides
- (4) ST205-75R 15-inch radial tires with 6-bolt white spoke rims
- (2) Tandem fenders
- 2-inch coupler
- Swivel jack with pad
- Rubber mounted sealed lights
- Tanks are enclosed in a powder coated steel frame
- 5-foot x 4-foot x 12-inch storage area located under the water tanks, access doors are located at back of trailer
- Pressure washers sit on solid ¼-inch steel base (will fit all Mi-T-M pressure washers)
- Aluminum treadplate steps for access to water tanks
- (2) 200-gallon tanks are plumbed together

**Accessories for Dual-Axle Trailers**

- Pressure washers
- Hose reels



*Storage area located under the water tanks*

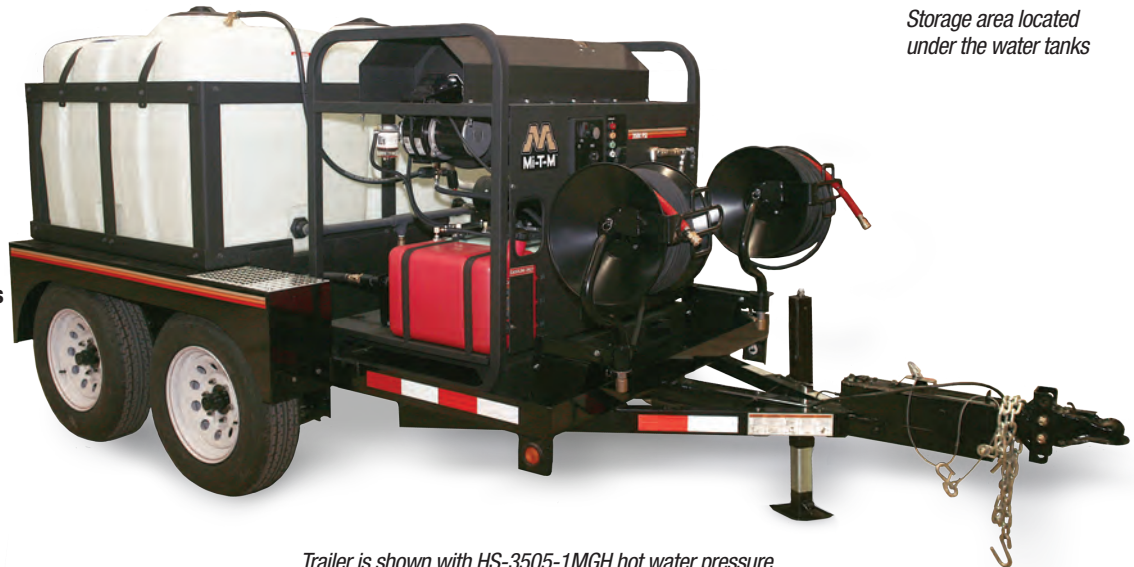

*Trailer is shown with HS-3505-1MGH hot water pressure washer and hose reels (available as accessories)*

**AW-9000-0008** (With surge brakes and (1) 200-gallon water tank)

- 5-foot x 8½-foot trailer
- 3-inch x ¼-inch angle frame
- 7,000-lb. gross vehicle weight
- (2) 3,500-lb. axles with brakes on both sides
- (4) ST205-75R 15-inch radial tires with 6-bolt white spoke rims
- (2) Tandem fenders
- 2-inch coupler
- Swivel jack with pad
- Rubber mounted sealed lights
- Tank is enclosed in a powder coated steel frame
- Pressure washers sit on solid ¼-inch steel base (will fit all Mi-T-M pressure washers)
- Aluminum treadplate steps for access to water tank

**Accessories for Dual-Axle Trailers**

- Pressure washers
- Hose reels



*AW-9000-0008 shown with HS-3006-0MDK hot water pressure washer and hose reel (available as accessories)*